

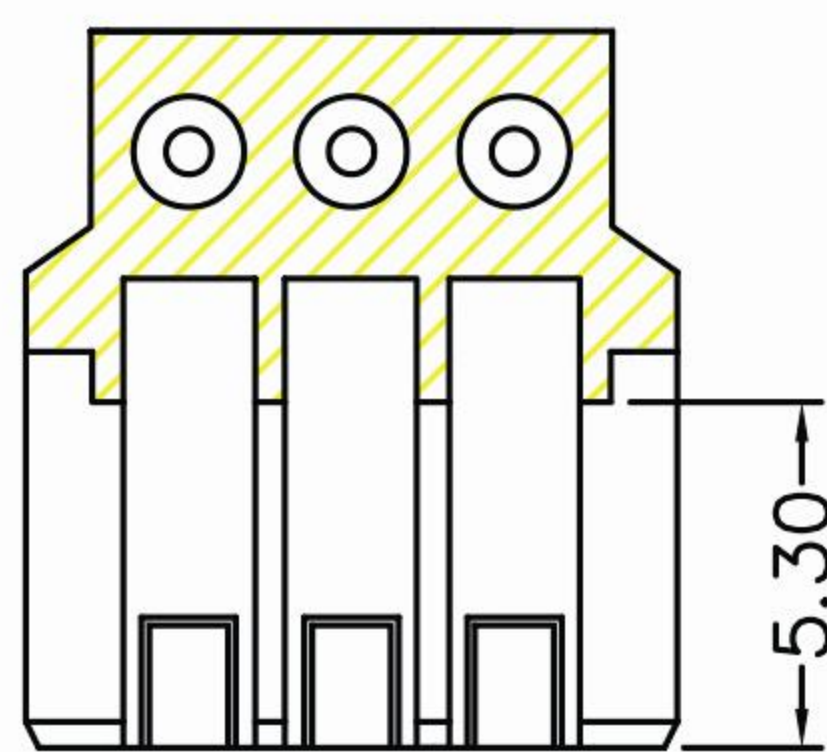


SPECIFICATION

Current rating: 3AAC, DC
 Voltage rating: 32V AC, DC
 Operating Temperature: -40°C--+120°C
 Contact Resistance: 10mΩ max.
 Insulation resistance: 1000MΩ min.
 Withstanding voltage: 1400V AC/minute
 Material: Housing: Nylon66 UL94V-0
 Terminal: Phosphor bronze, Tin-plated
 Wire range: AWG 24 to 22
 GWT: 750°C IEC-60335-1


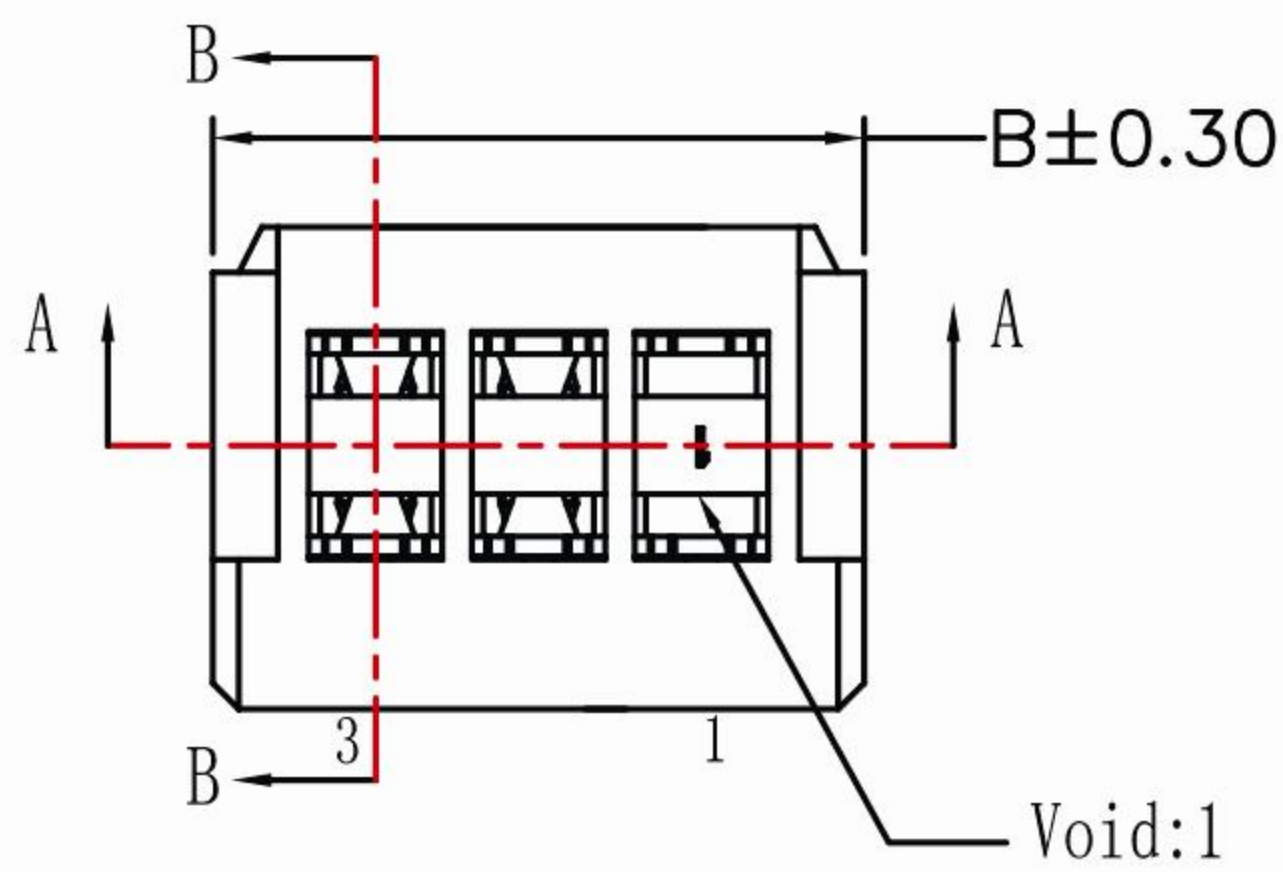


SECTION: A-A

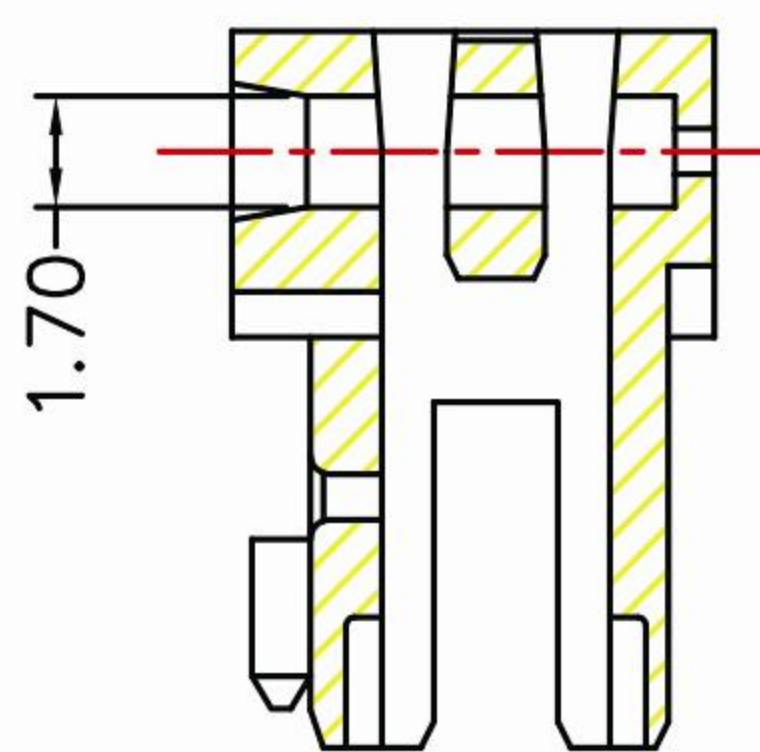



SECTION: B-B

Dimension		
Circuit No.	A	B
2	2.5	7.5
3	5.0	10.0
4	7.5	12.5
5	10.0	15.0
6	12.5	17.5
7	15.0	20.0
8	17.5	22.5
9	20.0	25.0
10	22.5	27.5
11	25.0	30.0
12	27.5	32.5
13	30.0	35.0
14	32.5	37.5
15	35.0	40.0
16	37.5	42.5
17	40.0	45.0
18	42.5	47.5
19	45.0	50.0
20	47.5	52.5

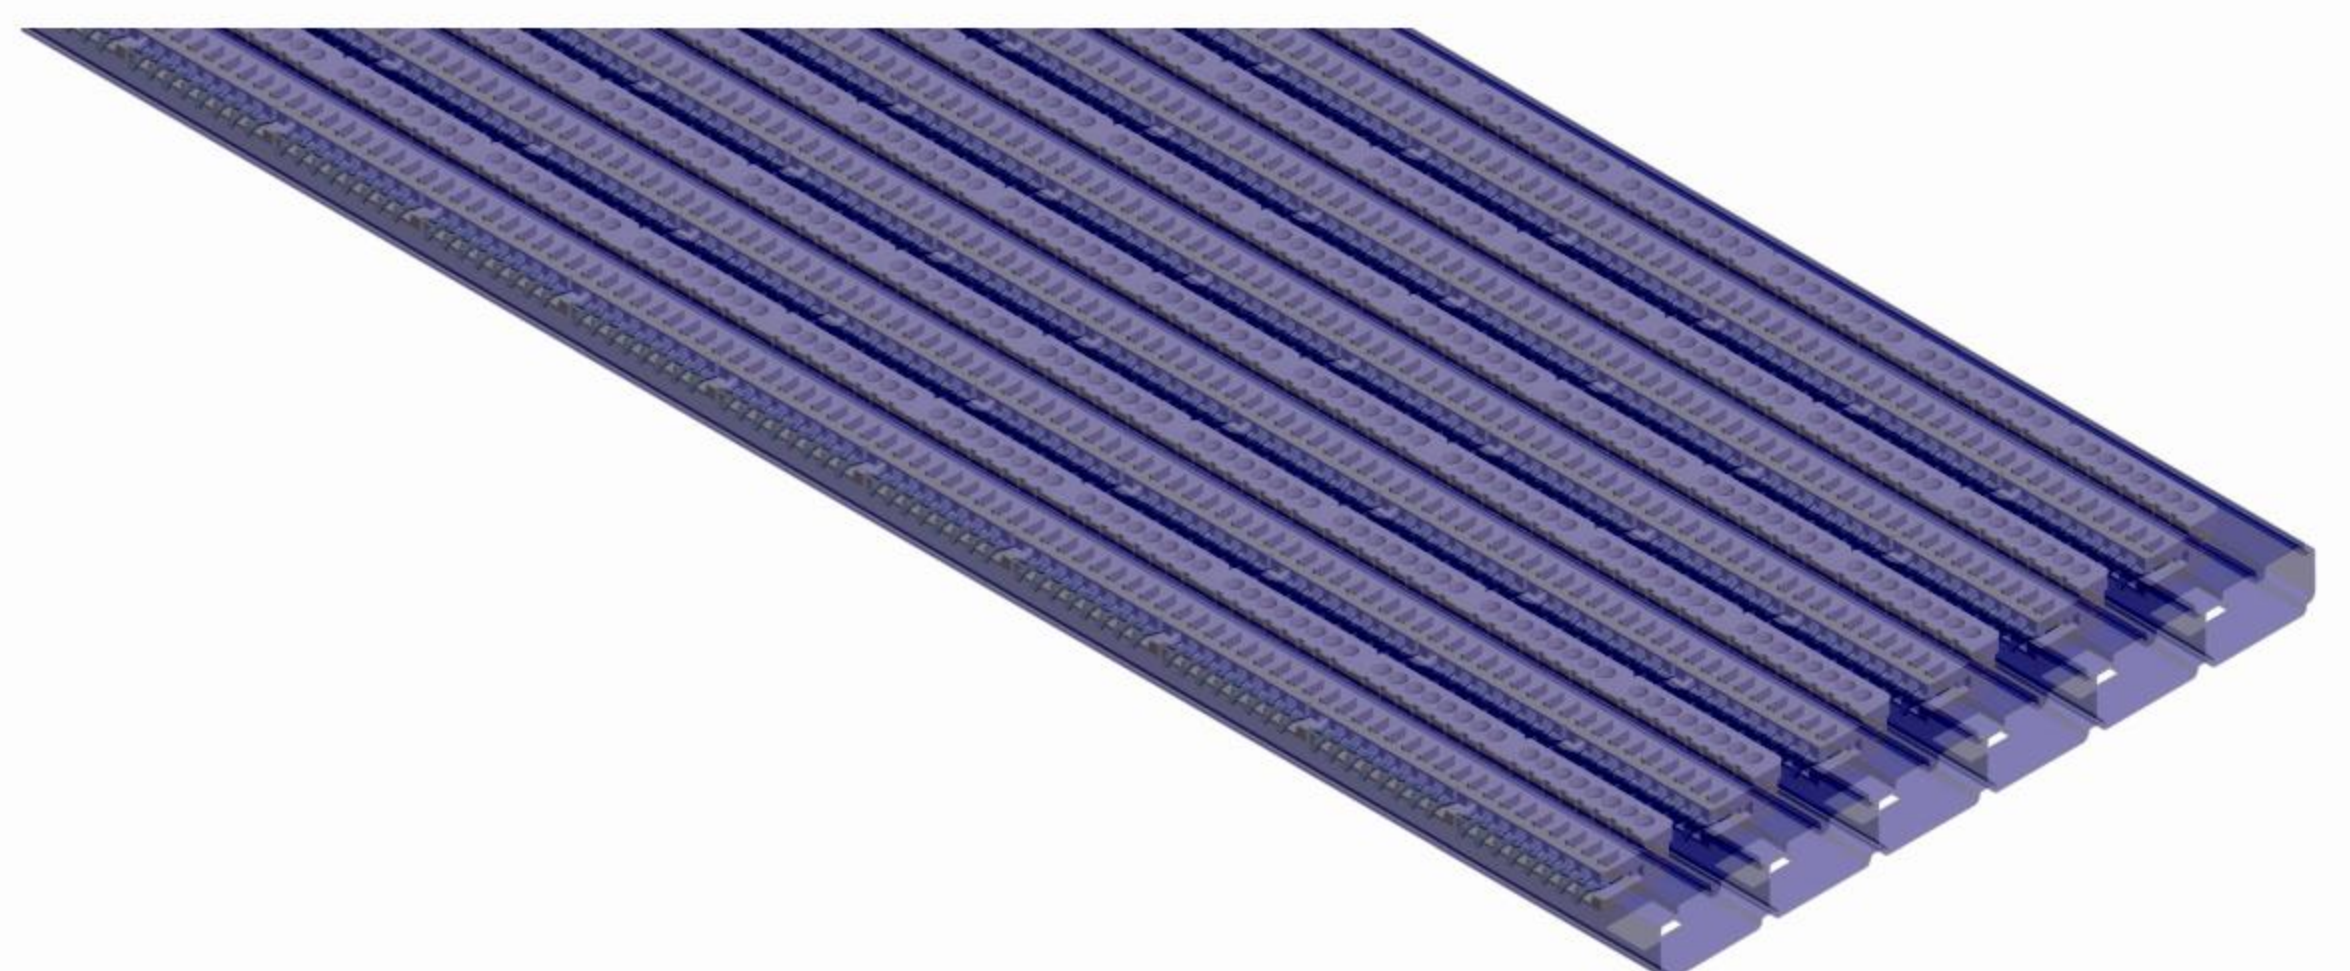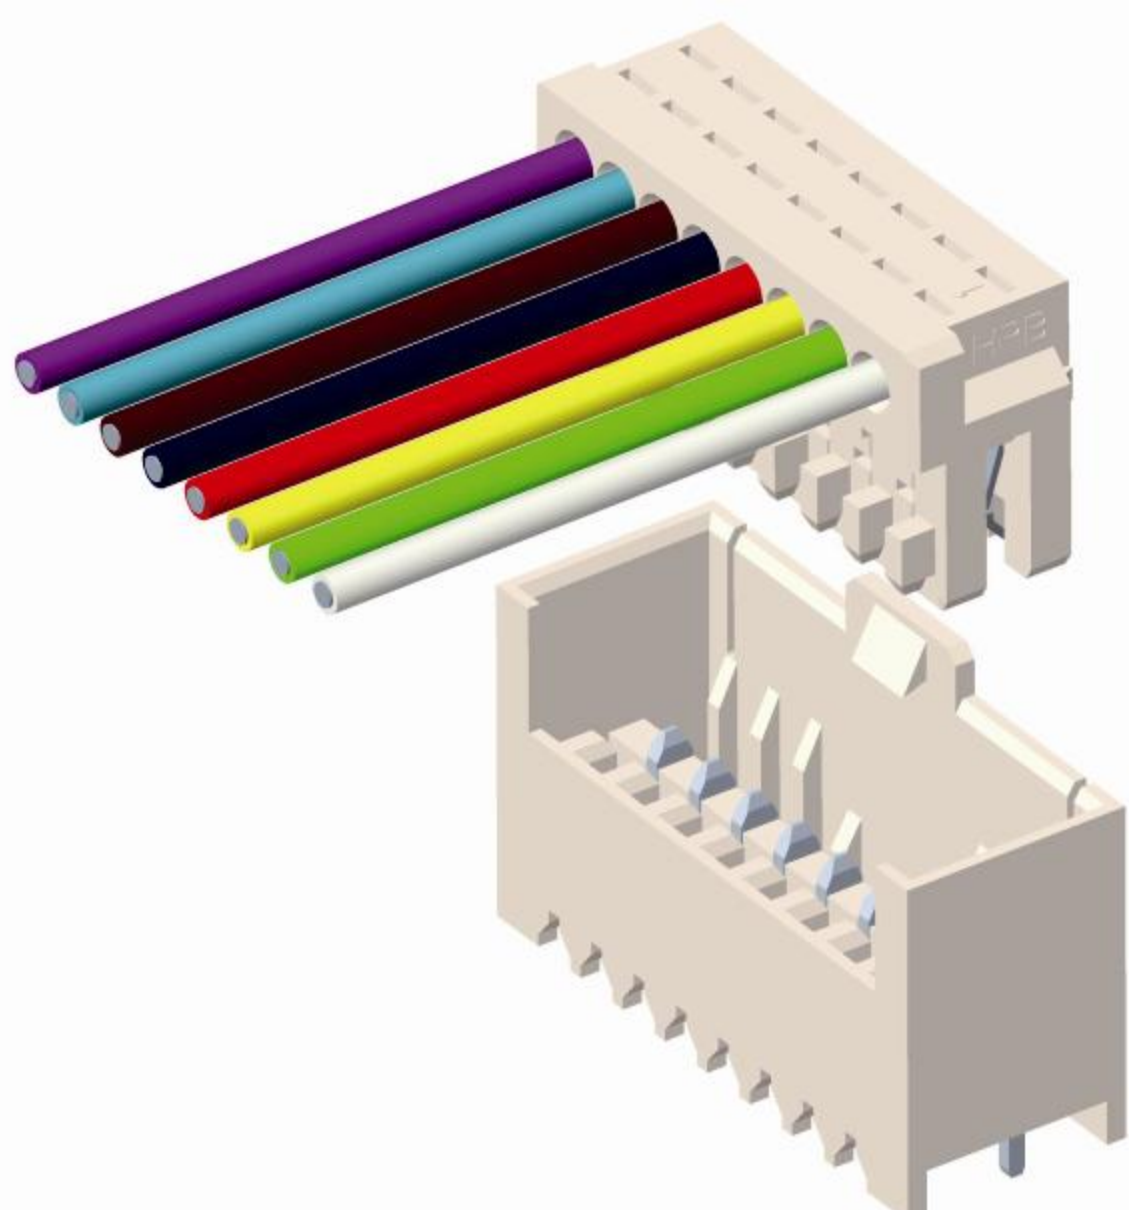




M7234 Series coding chart

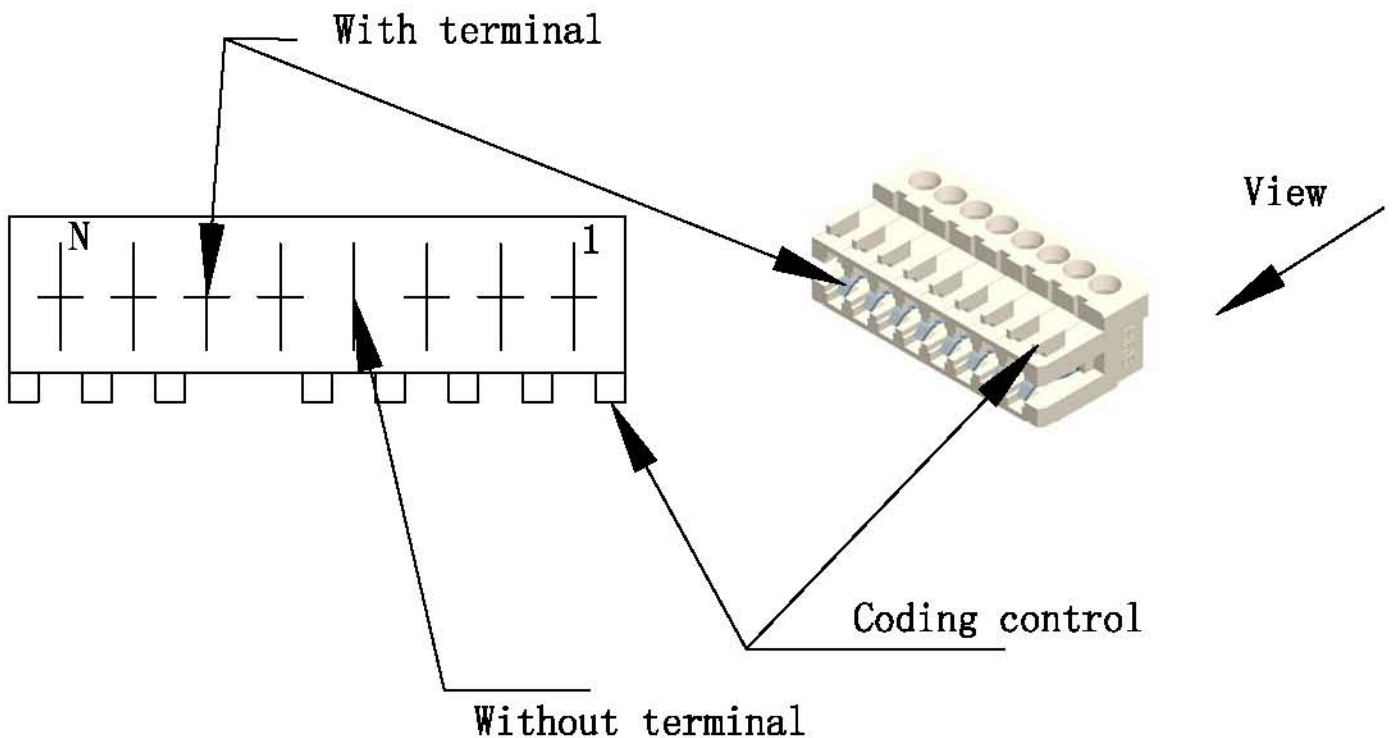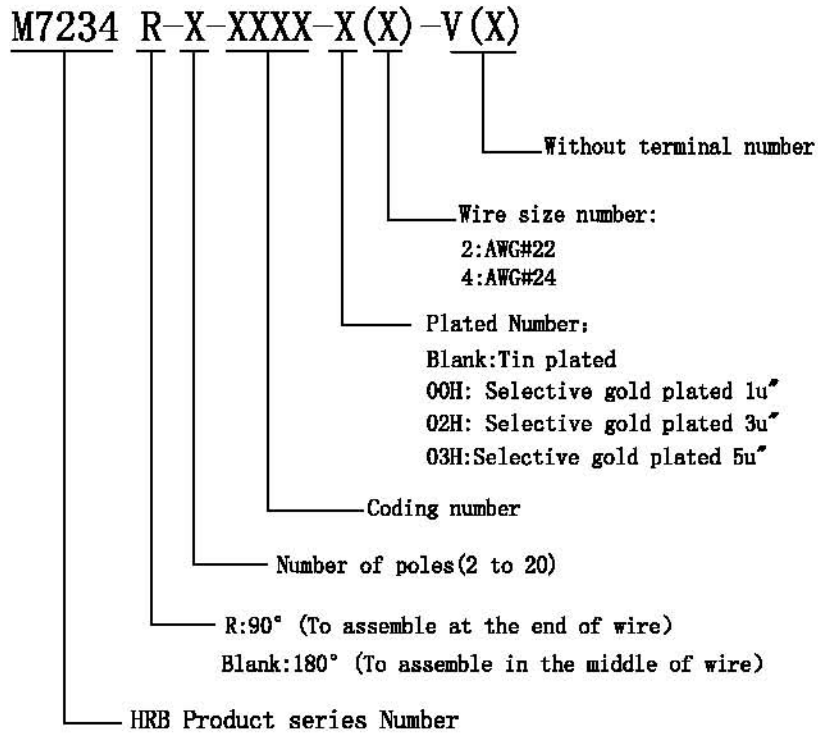

The following part numbers are the ones that have been producing in HRB. Of course, we can adjust the fool-proof positions and circuits of product to define some new part numbers and produce.


You're welcome to choose our product!

2 Circuits




M7234R-2-0000 (2)


3 Circuits




M7234R-3-0000 (2)



M7234R-3-0000 (4)




M7234R-3-0001 (4)-V1




M7234R-3-0000 (2)-V1


4 Circuits



M7234R-4-0000 (2)




M7234R-4-0001 (4)




M7234R-4-0001 (2)

5 Circuits

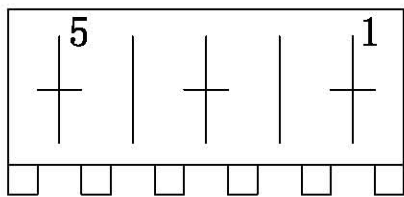


M7234R-5-0000 (2) -V2

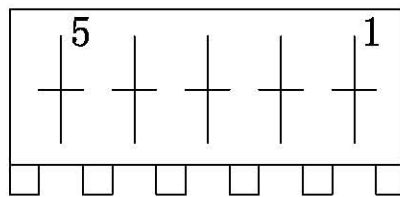


M7234R-5-0000 (4)

6 Circuits

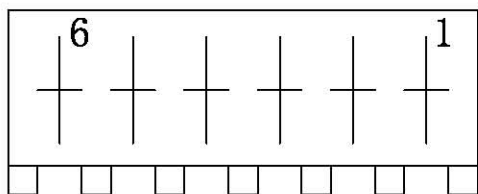


M7234R-6-0000 (2)

8 Circuits

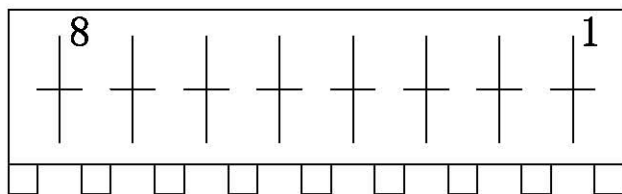

M7234R-8-0000 (4)

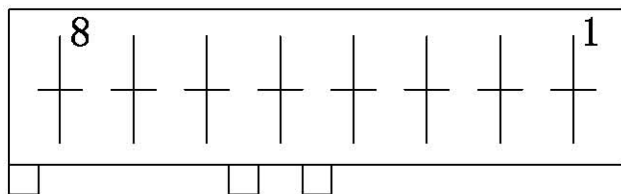

M7234R-8-0001 (4)